

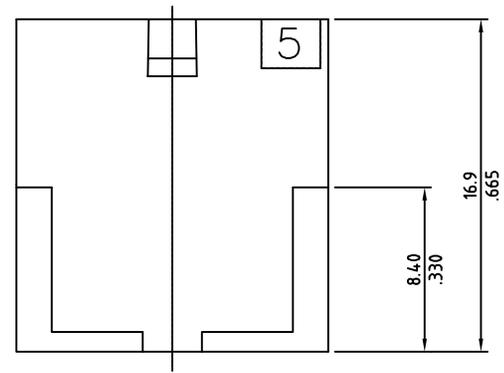


SIGN	DATE	DESCRIPTION	APPROVER

THIS IS CAD DRAWING, DO NOT REVISE MANUALLY!!!

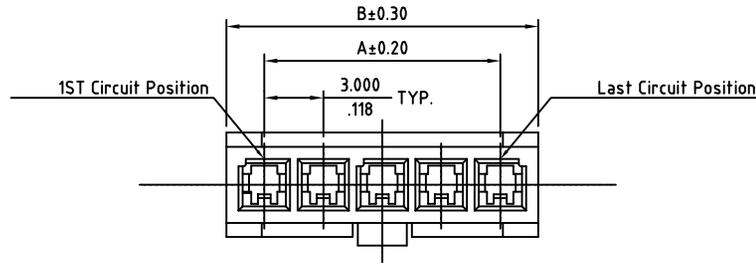

Back View

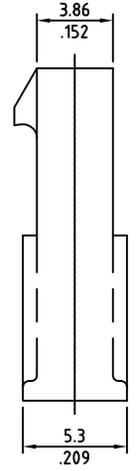

SPECIFICATIONS

Body: PBT  
 Color: Black  
 Flammability: UL94V-0  
 Current: 5A for AWG#20-22  
           4A for AWG#24  
           2A for AWG#26  
           1A for AWG#28-30  
 Voltage: 250V AC(r.m.s.)  
 Dielectric Withstanding: 1500 VAC for one minute  
 Insulation Resistance: >1000 MΩ  
 Contact Resistance: <10 mΩ  
 Operating Temperature: -40°C ± 105°C

RoHS Compliant

Circuits	Dimension	
	A	B
02	3.00(.118)	6.86(.270)
03	6.00(.236)	9.86(.388)
04	9.00(.354)	12.86(.506)
05	12.00(.472)	15.86(.624)
06	15.00(.591)	18.86(.742)
07	18.00(.709)	21.86(.860)
08	21.00(.827)	24.86(.978)
09	24.00(.945)	27.86(1.096)
10	27.00(1.063)	30.86(1.214)
11	30.00(1.181)	33.86(1.332)
12	33.00(1.299)	36.86(1.450)

THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF ON-SHORE TECHNOLOGY, INC. AND SHALL NOT BE REPRODUCED, COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF ON-SHORE TECHNOLOGY, INC.



TITLE		300HC1V Series - 3.00mm latch'n lock cable side housing, without ears, single row			
PART NO.	300HC1VXX0 (xx - circuits)	DWG NO.	300HC1VXX0.DWG		
APPROVED	CHECKED	DESIGNED	DRAWN	4050	
Sue 2007.02.14	Maresh 2007.02.14	Davis 2007.02.14	David 2007.02.13	Tolerance	
					UNIT: mm/inches
					SCALE: NONE
				SHEET: 01/01	REV: A

X.	±0.30/.012
XX	±0.20/.008
XXX	±0.10/.004