


SIGN	DATE	DESCRIPTION	APPROVER


THIS IS CAD DRAWING, DO NOT REVISE MANUALLY!!!

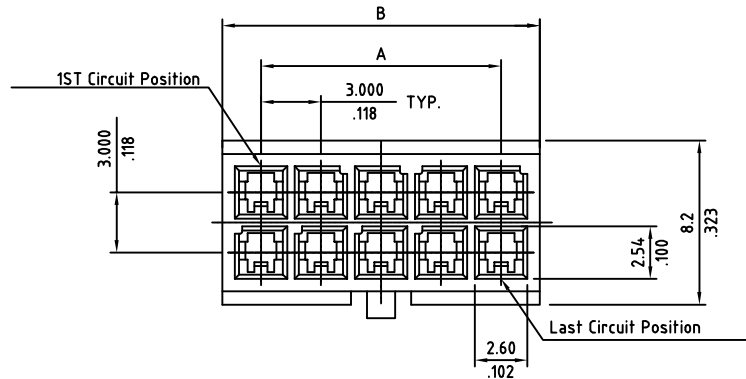

**SPECIFICATIONS**

Body: PBT  
 Color: Black  
 Flammability: UL94V-0  
 Current: 5A for AWG#20-22  
           4A for AWG#24  
           2A for AWG#26  
           1A for AWG#28-30  
 Voltage: 250V AC(r.m.s.)  
 Dielectric Withstanding: 1500 VAC for one minute  
 Insulation Resistance: >1000 MΩ  
 Contact Resistance: <10 mΩ  
 Operating Temperature: -40°C ± 105°C

RoHS Compliant

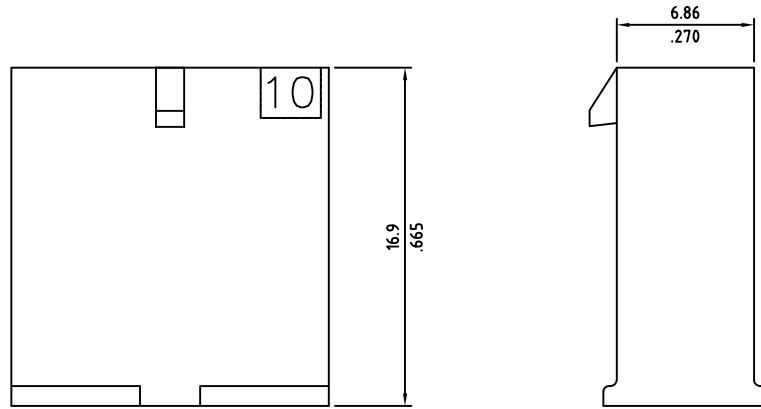

Circuits	Dimension	
	A	B
02	—	3.9(.154)
04	3.00(.118)	6.9(.272)
06	6.00(.236)	9.9(.390)
08	9.00(.354)	12.9(.508)
10	12.00(.472)	15.9(.626)
12	15.00(.591)	18.9(.744)
14	18.00(.709)	21.9(.862)
16	21.00(.827)	24.9(.980)
18	24.00(.945)	27.9(1.098)
20	27.00(1.063)	30.9(1.217)
22	30.00(1.181)	33.9(1.335)
24	33.00(1.299)	36.9(1.453)

THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF ON-SHORE TECHNOLOGY, INC. AND SHALL NOT BE REPRODUCED, COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF ON-SHORE TECHNOLOGY, INC.

**OST** ON-SHORE TECHNOLOGY, INC.

TITLE	300HC2V Series - 3.00mm latch'n lock cable side housing, without ears, dual row		
PART NO.	300HC2VXX0 (xx - circuits)	DWG NO.	300HC2VXX0.DWG
APPROVED	CHECKED	DESIGNED	DRAWN
Sue 2007.02.14	Maresh 2007.02.14	Davis 2007.02.14	David 2007.02.13
4050			Tolerance
			X. ±0.30/.012 X.X ±0.20/.008 X.XX ±0.10/.004
SHEET: 01/01			UNIT: mm/inches SCALE: NONE REV.: A