


# ED3191/X (2.5 mm) Slade Grey EDZ3191/X (2.54 mm) Orange



2-n poles, Spacing 2.5 mm or 2.54 mm  
insert required no. of poles  $\times$   
How to order see page 5

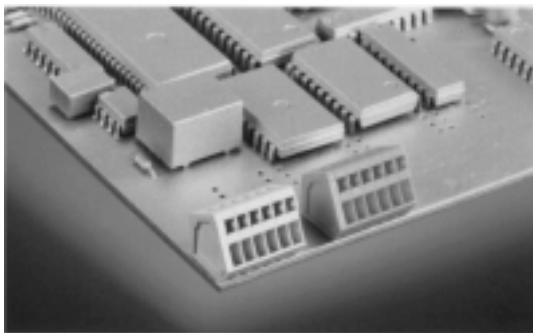

## Ratings:

Rated Voltage	150 V	130 V
Rated Current	4 A	9 A (T60)
Wire Size	AWG 28-20	0.5 mm <sup>2</sup>
Test Voltage		1.25 kV

## Max. Rated Cross Section

Single Wire (solid)	0.5 mm <sup>2</sup>
Stranded Wire (flexible)	on request
Stranded wire with Ferrules	on request

## Dimensions

Spacing	2.5 mm (2.54 mm)
PCB Hole Diameter	1.1 mm (2x)
Stripped Length	5.0 mm

## Materials

Insulating Material	PA
Flammability Class	UL94 V-0
Temperature Range	-30°C/+105°C
Cage Clamp	Stainless Steel
Wire Guard	Cu

## Color

Slade Grey, (Orange)

