


ED3751/X (5.0 mm) EDZ3751/X (5.08 mm)



1-n poles, Spacing 5.0 mm (5.08 mm)
insert required no. of poles **X**
How to order see page 5

*factory wiring

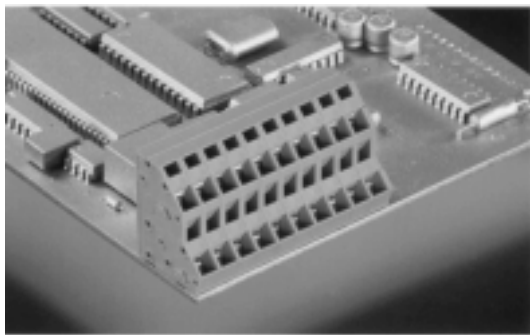

Ratings:

Rated Voltage	300 V	250 V
Rated Current	16 A*	12 A (T60)
Wire Size	AWG 28-14	2.5 mm ²
Test Voltage		2 kV

Max. Rated Cross Section

Single Wire (solid)	2.5 mm ²
Stranded Wire (flexible)	2.5 mm ²
Stranded wire with Ferrules	1.5 mm ²

Dimensions

Spacing	5.0 mm (5.08 mm)
PCB Hole Diameter	1.0 mm (2x)
Stripped Length	6.0 mm

Materials

Insulating Material	PA
Flammability Class	UL94 V-0
Temperature Range	-30°C/+105°C
Cage Clamp	Stainless Steel
Wire Guard	Cu

Color

Green

