


# ED4292/X-KD



1-n poles, Spacing 3.5 mm  
insert required no. of poles  $\times$   
How to order see page 5

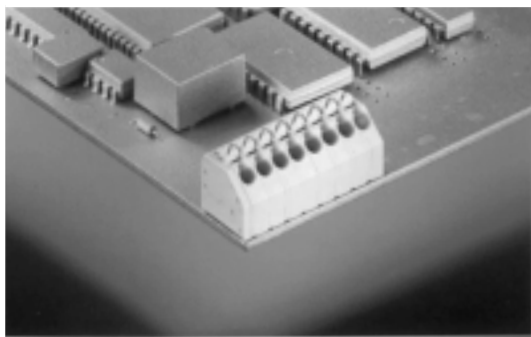

## Ratings:

|                                   |           |                      |
|-----------------------------------|-----------|----------------------|
| Rated Voltage                     | 300 V     | 250 V                |
| Rated Current                     | 6 A       | 3 A (T60)            |
| Wire Size                         | AWG 22-16 | 0.75 mm <sup>2</sup> |
| Rating Impulse Voltage/Dirt Level |           | 1.25 kV              |

## Max. Rated Cross Section

|                     |                     |
|---------------------|---------------------|
| Single Wire (solid) | 1.5 mm <sup>2</sup> |
|---------------------|---------------------|

## Dimensions

|                   |        |
|-------------------|--------|
| Spacing           | 3.5 mm |
| PCB Hole Diameter | 1.0 mm |
| Stripped Length   | 9.0 mm |

## Materials

|                     |              |
|---------------------|--------------|
| Insulating Material | PA           |
| Flammability Class  | UL94 V-0     |
| Temperature Range   | -30°C/+105°C |
| Contact             | Cu           |

## Color

Slade Grey

