


# EDSTLZ1590/X



2-20 poles, Spacing 3.81 mm  
insert required no. of poles **X**  
How to order see page 5

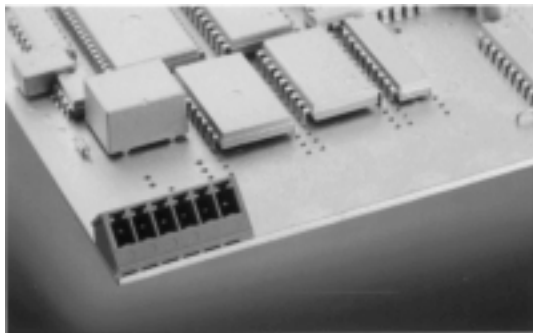

## Ratings:

Rated Voltage	300V	160 V
Rated Current	8 A	9 A (T60)
Rating Impulse Voltage/Dirt Level		4 kV/3

## Dimensions

Spacing	3.81 mm
PCB Hole Diameter	1.2 mm

## Materials

Insulating Material	PBTP
Flammability Class	UL94 V-0
Temperature Range	-30°C/+105°C
Contact Pin	Cu

## Color

Green

