


# EDSTLZ960/X



2-16 poles, Spacing 7.62 mm  
insert required no. of poles **X**  
How to order see page 5

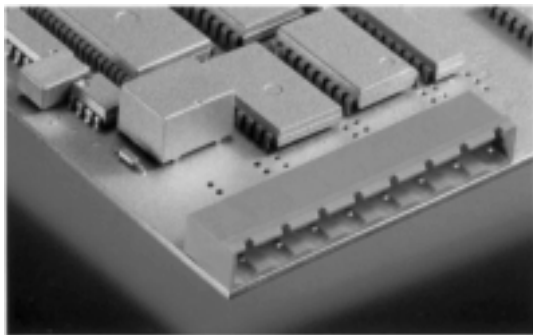

## Ratings:

Rated Voltage	300 V	400 V
Rated Current	15 A	12 A (T60)
Rating Impulse Voltage/Dirt Level		6 kV/3

## Dimensions

Spacing	7.62 mm
PCB Hole Diameter	1.4 mm

## Materials

Insulating Material	PA/PBTP
Flammability Class	UL94 V-0
Temperature Range	-30°C/+105°C
Contact	Cu

## Color

Green

