


EDZ1200/X



2-24 poles, Spacing 5.08 mm
 insert required no. of poles \times
 How to order see page 5

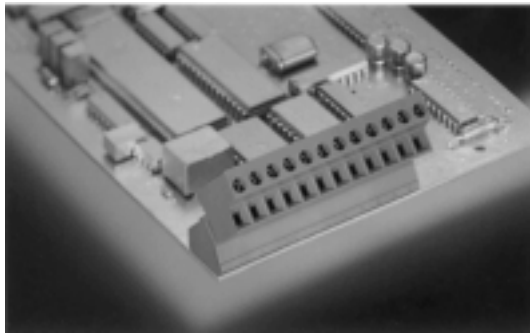

Ratings:

Rated Voltage	300V	250 V
Rated Current	15 A	12 A (T60)
Wire Size	AWG 22-12	2.5 mm ²
Rating Impulse Voltage/Dirt Level		4 kV/3
Rated Torque/Screw Size		0.5 Nm/M2.5

Max. Rated Cross Section

Single Wire (solid)	2.5 mm ²
Stranded Wire (flexible)	2.5 mm ²
Stranded wire with Ferrules	2.5 mm ²

Dimensions

Spacing	5.08 mm
Stripped Length	10.0 mm

Materials

Insulating Material	PA
Flammability Class	UL94 V-0
Temperature Range	-30°C/+105°C
Clamp Cage	Fe/Fe
Contact	CuSn

Color

Green

