


# ED3191/X (2.5 mm) Slade Grey EDZ3191/X (2.54 mm) Orange



2-n poles, Spacing 2.5 mm or 2.54 mm  
insert required no. of poles  $\times$   
How to order see page 5

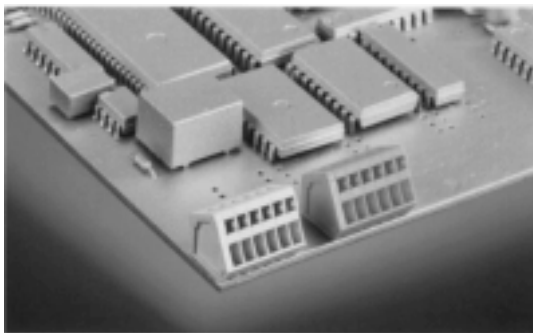

## Ratings:

|               |           |                     |
|---------------|-----------|---------------------|
| Rated Voltage | 150 V     | 130 V               |
| Rated Current | 4 A       | 9 A (T60)           |
| Wire Size     | AWG 28-20 | 0.5 mm <sup>2</sup> |
| Test Voltage  |           | 1.25 kV             |

## Max. Rated Cross Section

|                             |                     |
|-----------------------------|---------------------|
| Single Wire (solid)         | 0.5 mm <sup>2</sup> |
| Stranded Wire (flexible)    | on request          |
| Stranded wire with Ferrules | on request          |

## Dimensions

|                   |                  |
|-------------------|------------------|
| Spacing           | 2.5 mm (2.54 mm) |
| PCB Hole Diameter | 1.1 mm (2x)      |
| Stripped Length   | 5.0 mm           |

## Materials

|                     |                 |
|---------------------|-----------------|
| Insulating Material | PA              |
| Flammability Class  | UL94 V-0        |
| Temperature Range   | -30°C/+105°C    |
| Cage Clamp          | Stainless Steel |
| Wire Guard          | Cu              |

## Color

Slade Grey, (Orange)

