


EDZ4301/X-KD



2-7 poles, Spacing 5.08 mm
insert required no. of poles \times
How to order see page 5

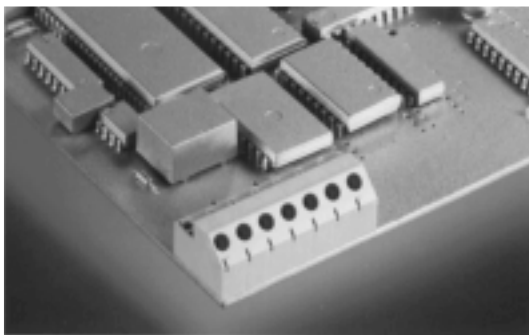

Ratings:

Rated Voltage	300 V	250 V
Rated Current	16 A	17.5 A (T60)
Wire Size	AWG 22-14	1.5 mm ²
Rating Impulse Voltage/Dirt Level		2.0 kV

Max. Rated Cross Section

Single Wire (solid)	1.5 mm ²
Stranded Wire (flexible)	on request
Stranded wire with Ferrules	on request

Dimensions

Spacing	5.08 mm
PCB Hole Diameter	1.3 mm (2x)
Stripped Length	10.0 mm

Materials

Insulating Material	PA
Flammability Class	UL94 V-0
Temperature Range	-30°C/+105°C
Tension Spring	Stainless Steel
Wire Guard	Cu

Color

Slade Grey

