


# EDZ1700/X



2-20 poles, Spacing 3.81 mm  
insert required no. of poles **X**  
How to order see page 5

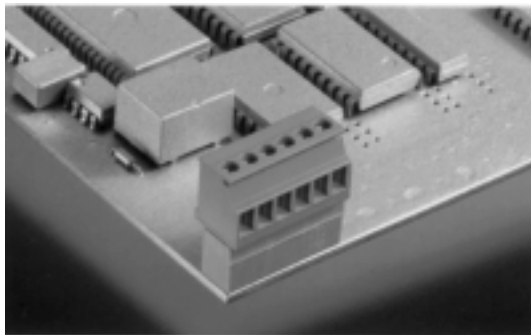

## Ratings:

Rated Voltage	300V	160 V
Rated Current	8 A	9 A (T60)
Wire Size	AWG 28-16	1.5 mm <sup>2</sup>
Rating Impulse Voltage/Dirt Level		4 kV/3
Rated Torque/Screw Size		0.4 Nm/M2

## Max. Rated Cross Section

Single Wire (solid)	1.5 mm <sup>2</sup>
Stranded Wire (flexible)	1.0 mm <sup>2</sup>
Stranded wire with Ferrules	1.0 mm <sup>2</sup>

## Dimensions

Spacing	3.81 mm
Stripped Length	7.0 mm

## Materials

Insulating Material	PA
Flammability Class	UL94 V-0
Temperature Range	-30°C/+105°C
Terminal Block	CuZn
Contact	CuSn

## Color

Green

