


ED3191/X-KD (2.5 mm) Slade Grey

EDZ3191/X-KD (2.54 mm) Orange



2-n poles, Spacing 2.5 mm or 2.54 mm
insert required no. of poles **X**
How to order see page 5

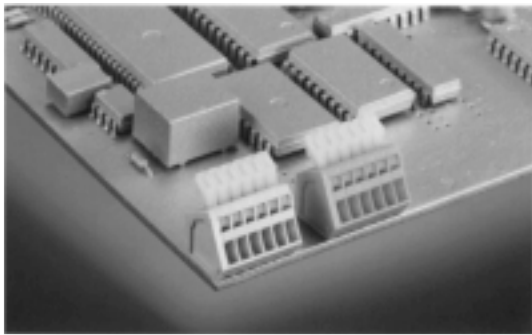

Ratings:

Rated Voltage	150 V	130 V
Rated Current	4 A	9 A (T60)
Wire Size	AWG 28-20	0.5 mm ²
Test Voltage		1.25 kV

Max. Rated Cross Section

Single Wire (solid)	0.5 mm ²
Stranded Wire (flexible)	on request
Stranded wire with Ferrules	on request

Dimensions

Spacing	2.5 mm (2.54 mm)
PCB Hole Diameter	1.1 mm (2x)
Stripped Length	5.0 mm

Materials

Insulating Material	PA
Flammability Class	UL94 V-0
Temperature Range	-30°C/+105°C
Cage Clamp	Stainless Steel
Wire Guard	Cu

Color

Slade Grey, (Orange)

