




1

2


3

4


5

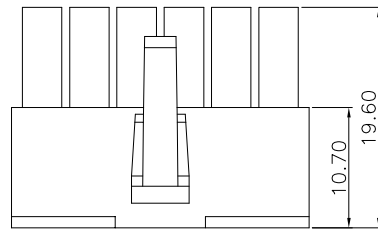

02P&amp;04~06P



3Pin




Specifications:  
 Current rating:9.0Amps  
 Voltage rating:600V AC,DC  
 Contact resistance:20mohm Max  
 Insulation resistance:1,000Mohm min.  
 Dielectric Withstanding:1,500V AC;DC  
 Operating Temperature:-40°C ~ +105°C

Material:  
 Insulator:Nylon 66 (UL94V-2) or (UL94V-0)  
 Insulator Color:Transparent or White or Ivory


How To Order:  
 420C1POXX0  
 XX-Number of positions

Dimension Information:


Pos	Dim.A	Dim.B
2	4.20	9.60
3	8.40	13.80
4	12.60	18.00
5	16.80	22.20
6	21.00	26.40



2P





4P



5P

RoHS Compliant

F				DRAWN:	GENERAL TOLERANCE:	 ON-SHORE TECHNOLOGY, INC.	DESCRIPTION: 4.2mm Receptacle Housing	SIZE <b>A4</b>
E				JAMIE	.X=±0.40 .XX=±0.30			
D				CHECKED:	UNIT: MM	PART NO: 420C1POXX0		
C				JERRY	SCALE: 1:1			
B				APPROVAL:	SHEET: 1/1			
A	16-JAN-2023		JAMIE	RORY	PROJECTION:			
REV	DATE	FILE	BY					