


With Kink



Without Kink

Specifications:
 Current rating: 2.0A AC, DC
 Voltage rating: 100V AC, DC
 Contact resistance: 20m ohm. Max
 Insulation resistance: 800M ohm. Min
 Withstanding voltage: 1000V AC/minute
 Operating temperature range: -25°C ~ +85°C


Material:
 Insulator: Nylon66 UL94V-0
 Default color: White
 Contact: Brass
 Plated: Tin Plated
 Color: White
 Packaging: Bulk/Bag

How To Order:
 CBCH11TV0XXX5BU

1: straight kink
 2: right kink
 No. of Contacts


Dimension:

Circuits	Dimension:		Circuits	Dimension:	
	A	B		A	B
02	2.00	6.10	10	18.00	22.10
03	4.00	8.10	11	20.00	24.10
04	6.00	10.10	12	22.00	26.10
05	8.00	12.10	13	24.00	28.10
06	10.00	14.10	14	26.00	30.10
07	12.00	16.10	15	28.00	32.10
08	14.00	18.10	16	30.00	34.10
09	16.00	20.10			

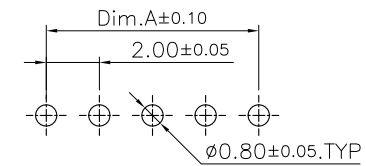

P.C.B Layout

RoHS Compliant

F				DRAWN: Lisy Liu	GENERAL TOLERANCE: .X=±0.20 .XX=±0.15	 ON-SHORE TECHNOLOGY, INC.
E						
D				CHECKED: Jerry Chen	UNIT: MM	DESCRIPTION: 2.00mm Wire to Board Wafer Straight Type
C					SCALE:	
B				APPROVAL: Lisy Liu	SHEET: 1/1	PART NO: CBCH11TV0XXX5BU
A	15-NOV-2022				PROJECTION:	
REV	DATE	FILE	BY	Rory Chen		