


Note1: Standard configuration  
 W/O middle bar(6~20P)  
 With middle bar(22~48P)

Dimension:

Positions	DIM.A	DIM.B	DIM.C	DIM.D
06	7.62	5.08	10.16	7.62
08	10.16	7.62	10.16	7.62
14	17.78	15.24	10.16	7.62
16	20.32	17.78	10.16	7.62
18	22.86	20.32	10.16	7.62
20	25.40	22.86	10.16	7.62


Positions	DIM.A	DIM.B	DIM.C	DIM.D
22	27.94	25.40	12.70	10.16
24	30.48	27.94	17.78	15.24
28	35.56	33.02	17.78	15.24
32	40.64	38.10	17.78	15.24
40	50.80	48.26	17.78	15.24
42	53.34	50.80	17.78	15.24
48	60.96	58.42	17.78	15.24

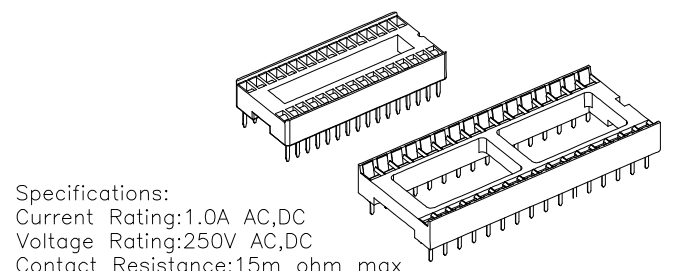

Specifications:  
 Current Rating:1.0A AC,DC  
 Voltage Rating:250V AC,DC  
 Contact Resistance:15m ohm max  
 Insulator Resistance:5000M ohm min  
 Dielectric Withstanding voltage:1000V AC/minute  
 Operating Temperature:-40°C to +105°C  
 Material:  
 Insulator:High Temp. Plastic (PBT UL 94V-0)  
 Standard Color:Black  
 Contacts:Phosphor Bronze  
 Finish:Tin Plated

How To Order  
 EDXXXDT

— Add 1 for 7.62mm spacing on 24, 28 positions otherwise leave blank  
 — NO. Of Position

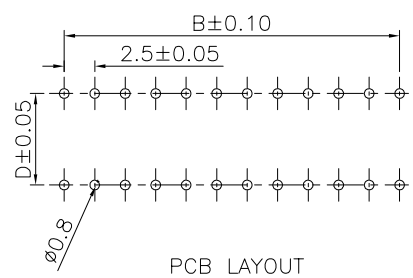

RoHS Compliant

F			
E			
D			
C			
B			
A	25-MAR-2011		Jeff Zhou
REV	DATE	FILE	BY

DRAWN:	Jeff Zhou
CHECKED:	
APPROVAL:	Mike Wu

GENERAL TOLERANCE:	.X=±0.20 .XX=±0.15
UNIT:	MM
SCALE:	1:1
SHEET:	1/1
PROJECTION:	

ON-SHORE TECHNOLOGY, INC.	
DESCRIPTION:	2.54mm IC Socket Stamp Pin
PART NO:	EDXXXDT

SIZE  
**A4**