
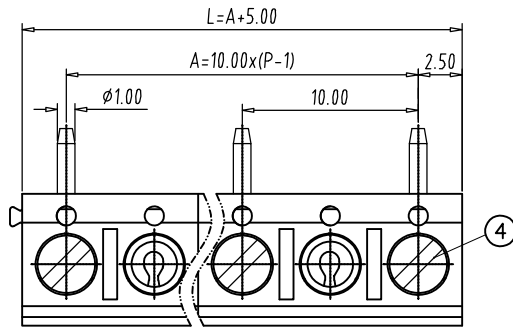


Transfer or duplication of this document as well as the utilisation or communication of its content are not permitted unless express consent is granted. Violations give rise to claims for damages. All rights reserved in case of patent, utility model or design patent registrations.

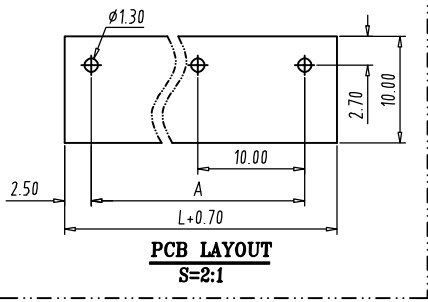

Technical Data:  
**Electrical**  
 Pitch: 10.0mm  
 Voltage rating: 300V  
 Current rating: 16 Amps  
 Contact resistance: 5mΩ(max)  
 Withstanding Voltage: 2000VAC(1min) Test time=60sec/1pcs  
 Wire range: 14-24AWG  
 Wire strip length: 4.5-5mm




**Mechanical:**  
 Torque: 0.4n-M  
 Operating temperature: -40°C to +105°C  
 Soldering temperature:  
 Temperature= 250°C±10°C /5 seconds max  
 Safety approval:   
 RoHS Compliance

Part No.:

**OSTTDXX1161**

No. of Poles	COLOR
02 2 Poles	0: Black
03 3 Poles	2: Red
...	3: Orange
24 24 Poles	4: Yellow
	5: Green
	6: Blue (Standard)
	8: Grey

Nonstandard colors  
Mins could apply

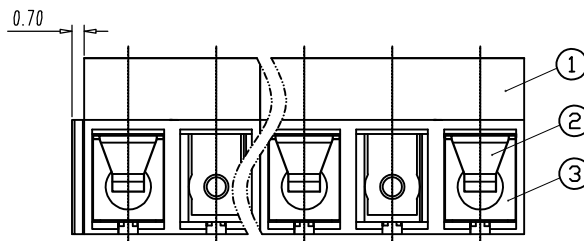

4	Screw	Steel	M2.5/Zn plated	1xN
3	Solder pin	Copper Alloy	Tin plated	1xN
2	Spring	Stainless steel		1xN
1	Body	PA66 UL94V-0		1
ITEM	NAME OF PART	MATERIAL	NOTES	Q"TY
DWG.	DATE	UNITS: MM	SHEET: 1 OF 1	Tolerance
CHK.	DATE	SCALE: NONE 5:1 (:)	REV: A	X. ±0.50
APP.	DATE	TITLE: OSTTD SERIES 10.0MM		XX ±0.30
		PART NO. OSTTDXX1161		X.XX ±0.10
		DWG NO. OSTTDXX1161.DWG		X* ±1°

REV	△	SIGN	DESCRIPTION	CHK.	DATE



ON-SHORE TECHNOLOGY, INC.

