


Specifications:  
 Current rating: 3.0A AC/DC  
 Voltage rating: 250V AC/DC  
 Contact resistance: 20m ohm. max.  
 Insulation resistance: 1000M ohm. Min.  
 Withstanding voltage: 500V AC for one minute  
 Operating temperature range: -40°C to + 105°C  
 Material and Finish:  
 Insulator:PBT UL94V-0  
 Contact:Brass  
 Plating:Gold Plated  
 How To Order  
 SH4-XXX

G:Gold Plated  
 T:Tin Plated  
 S>Selective Gold Plated  
 No. Of Positions

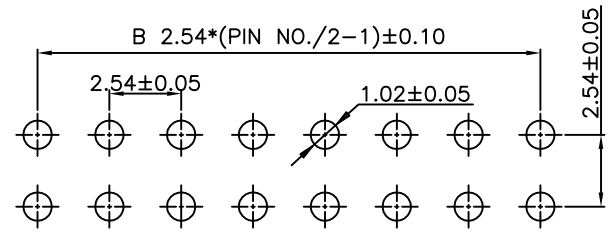

PCB LAYOUT

Dimension :

Poles	DIM:(mm)		Poles	DIM:(mm)		Poles	DIM:(mm)		Poles	DIM:(mm)	
	A	B		A	B		A	B		A	B
04	5.58	2.54	24	30.98	27.94	44	56.38	53.34	64	81.78	78.74
06	8.12	5.08	26	33.52	30.48	46	58.92	55.88	66	84.32	81.28
08	10.66	7.62	28	36.06	33.02	48	61.46	58.42	68	86.86	83.82
10	13.20	10.16	30	38.60	35.56	50	64.00	60.96	70	89.40	86.36
12	15.74	12.70	32	41.14	38.10	52	66.74	63.50	72	91.94	88.90
14	18.28	15.24	34	43.68	40.64	54	69.28	66.04	74	94.48	91.44
16	20.82	17.78	36	46.22	43.18	56	71.82	68.58	76	97.02	93.98
18	23.36	20.32	38	48.76	45.72	58	74.36	71.12	78	99.56	96.52
20	25.90	22.86	40	51.30	48.26	60	76.90	73.66	80	102.1	99.06
22	28.44	25.40	42	53.84	50.80	62	79.44	76.20			

RoHS Compliant

F				DRAWN:	GENERAL TOLERANCE:	
E				Jerry Chen	.X=±0.20 .XX=±0.15	
D				CHECKED:	UNIT: MM	ON-SHORE TECHNOLOGY, INC. DESCRIPTION: 2.54mm PCB Socket Double Row Right Angle SIZE
C					SCALE: 1:1	
B	08-Jan-2019	0.64>0.74	Jerry Chen	APPROVAL:	SHEET: 1/1	PART NO: 2214R-XXX-85
A	05-Dec-2018		Jerry Chen	Mike Wu	PROJECTION:	
REV	DATE	FILE	BY			