

1

2

3

4

5

Specifications:






Current Rating:1.0A AC/DC
Voltage Rating:30V AC/DC
Contact Resistance:50m Ohm .Max.
Insulation Resistance:1,00M Ohm. Min.
Withstanding Voltage:100V AC For One Minute
Operating Temperature:-40°C ~ +105°C

Material and Finish

Insulator:LCP (UL94V-0), Black $\triangle G \triangle H$
Contact:Copper Alloy
Contact Plating:Gold Plated on Contacts Area,
Tin Plated on Solder Tail.
Shell:Copper Alloy, Nickel Plated



How To Order
USB-MVBFBX

- 6:Gold Plated On Contact Area,
Tin Plated On Solder Tail
- 7:Gold Plated 15u" On Contact Area,
Tin Plated On Solder Tail
- 8:Gold Plated 30u" On Contact Area,
Tin Plated On Solder Tail

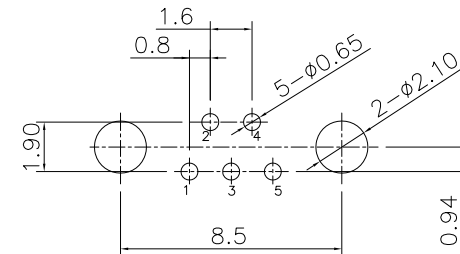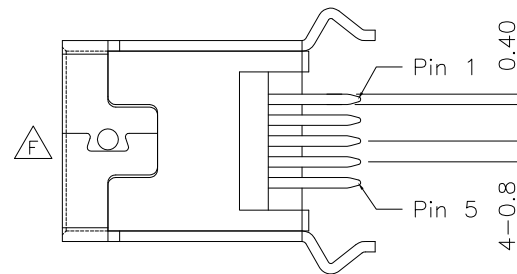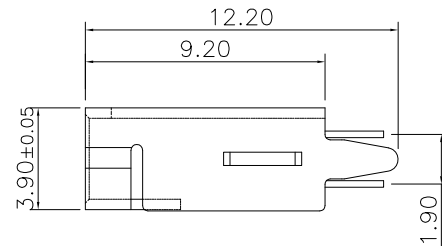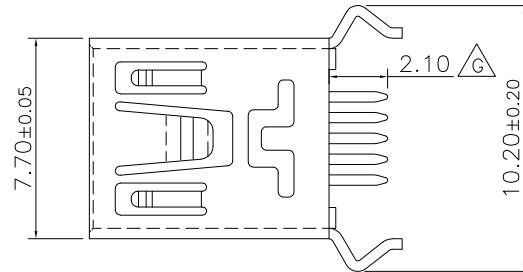

P.C.B Layout $\triangle E$

RoHS Compliant

J				DRAWN:	GENERAL TOLERANCE:	 ON-SHORE TECHNOLOGY, INC.	
I				ALLEN	.X=±0.20 .XX=±0.10		
H	23-MAY-2022	Add Plated Options	LUCY	CHECKED:	UNIT: MM	DESCRIPTION:	SIZE
G	28-JUN-2021	PBT>LCP $\triangle G$	MEI	JERRY	SCALE:	Mini USB 5pin Female Straight Type	
F	13-JUN-2019	Modify the direction of the iron	JAMIE	APPROVAL:	SHEET: 1/2	PART NO:	
A	14-JUL-2009		ALLEN	MIKE	PROJECTION: 	USB-MVBFBX	
REV	DATE	FILE	BY				